

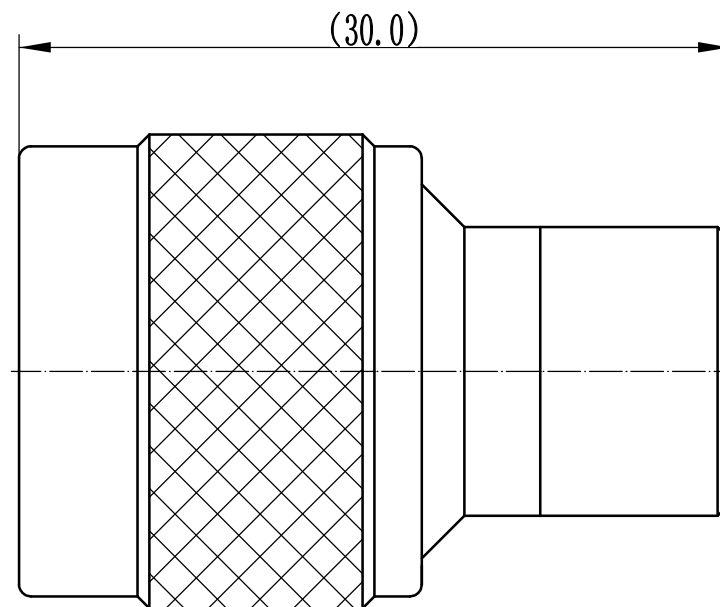
This document contains proprietary information and such information may not be disclosed to others for any purposes,  
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	12/1/12	12/1/12

- 1 Electrical
- 1.1 Impedence 50 Ω
  - 1.2 Frequency DC ~6GHz
  - 1.3 Dielectric withstanding voltage 1000V(volts RMS)
  - 1.4 Center contact resistance ≤ 3MΩ
  - 1.5 Outer contact resistance ≤ 2MΩ
  - 1.6 Insulation resistance: ≥5000MΩ
  - 1.7 Power ≤ 2W



- 2 Environmental&Mechanical
- 2.1 Temperature range -40℃ ~+85℃
  - 2.2 RoHs Compliant
  - 2.3 Durability >500 cycles

- 3 Materials&plating
- 3.1 Body: Brass, Nickel plated
  - 3.2 Insulator: Teflon
  - 3.3 Contact Pin: Bronze, gold plated



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 12/1/12 ENGINEER: C. Tao 12/1/12 APPROVED: W. Qiang 12/1/12	<b>TITLE:</b>  <b>RF TERMINATION</b>  <b>N Male Conn. Termination</b>	 <a href="http://www.teruilai.com">www.teruilai.com</a>   DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	<b>PART NO:</b> N-60JR-18A		<b>SIZE:</b> A4	<b>SCALE:</b> N/A	<b>SHEET:</b> 1/1