

1


2

3

4

A

A

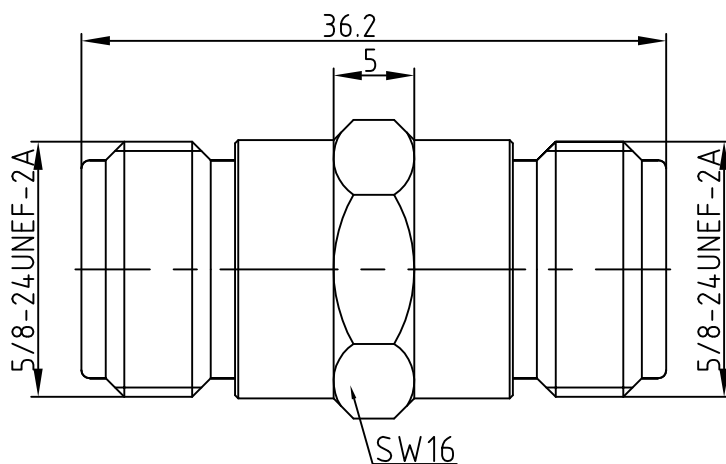

B

B

1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: 0-11GHz
- 1.3 Insulation resistance: $\geq 5000M\Omega$
- 1.4 Dielectric strength: 1500V
- 1.5 Contact resistance

Center contact $\leq 1M\Omega$

Outer contact $\leq 0.2M\Omega$

2 Material&Finish


- 2.1 Inner Contact: Phosphor bronze, gold plated
- 2. Outer Contact: Brass, Nickel plated
- 3. Insulators: PTFE

C

C

D

D



Scale

1:1

N-KK

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES

.X± .15 ±1°
.XX± .05
.XXX±

N female to female adaptor

No		Name	Date
1	Designed	Tomson	14-Mar-09
2	Checked	Jason	14-Mar-09
3	Approved	Teresa	14-Mar-09

Xi'an T-RELY ELECTRONICS CO., LTD.