

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	12/7/06	12/7/06

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: 0-6GHz
- 1.3 Working voltage: ≤170V
- 1.4 Insulation resistance: ≥1000MΩ
- 1.5 Dielectric withstanding voltage: 500V
- 1.6 Center contact resistance ≤ 10MΩ
- 1.7 Outer contact resistance ≤ 5MΩ



2 Material&Finish

- 2.1 Inner Contact: Beryllium Copper, gold plated
- 2.2 Outer Contact: brass, gold plated
- 2.3 Insulators: Teflon

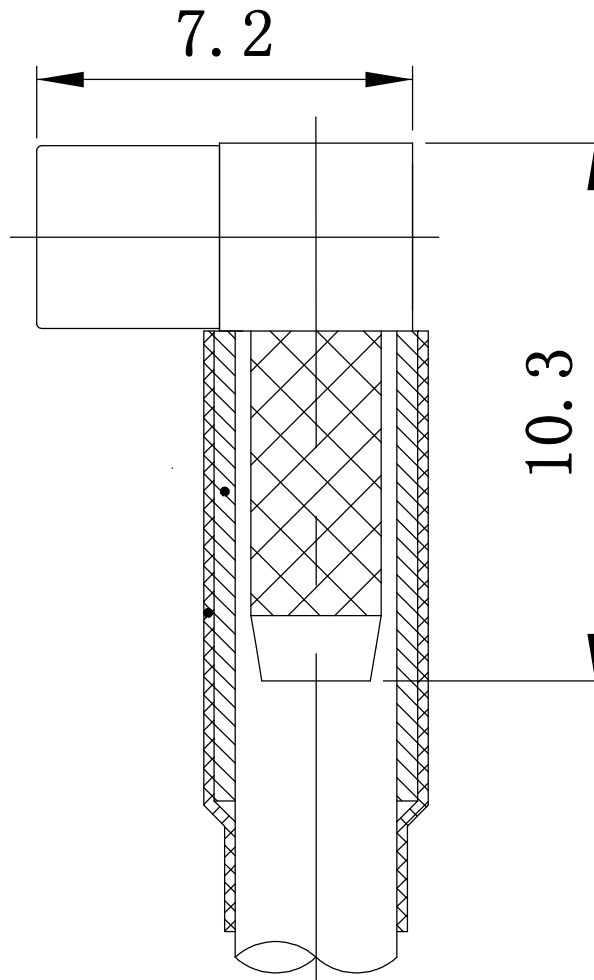

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 12/07/06 ENGINEER: C. Tao 12/07/06 APPROVED: W. Qiang 12/07/06 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	<b>TITLE:</b> RF Coaxial Connector MMCX Female Right Angle Conn. For RG316 cable	 <a href="http://www.t-relytech.com">www.t-relytech.com</a>  DIMENSION IN MILLIMETERS (mm)		
PART NO: MMCX-KW3	SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: A