


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	21/08/19	21/08/19

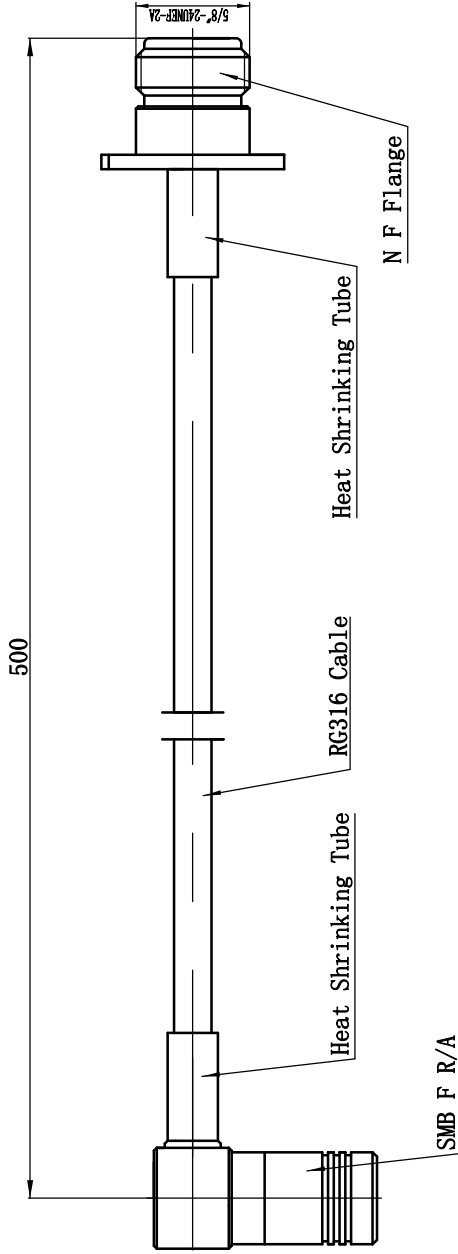

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 frequency DC~4 GHz
 - 1.3 VSWR 1.30:1
- 2 Mechanical
 - 2.1 Temperature range -45°C~125°C
 - 2.2 Durability 500 cycles
- 3 Cable Type: RG316 Cable

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 21/08/19 ENGINEER: C. Tao 12/11/19 APPROVED: W. Qiang 21/08/19 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.80 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: Cable Assembly SMB Female R/A Conn. to N Female Flange Conn. for RG316 Cable 600mm Length	 www.tertulial.com DIMENSION IN MILLIMETERS (mm)	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A
--	--	---	--