


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	21/08/19	21/08/19

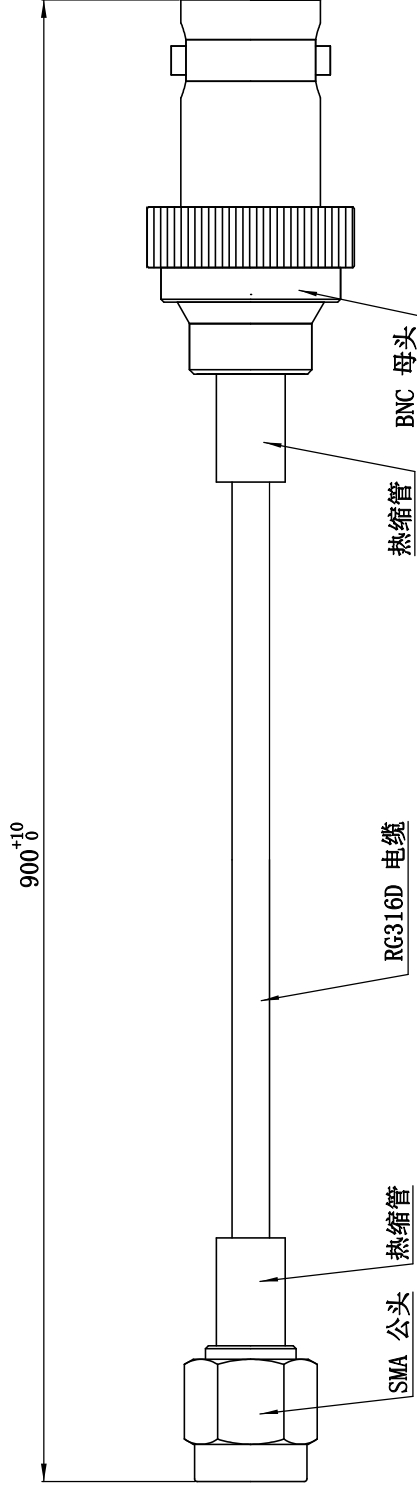

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 frequency DC~4 GHz
 - 1.3 VSWR 1.30:1
- 2 Mechanical
 - 2.1 Temperature range -45℃~125℃
 - 2.2 Durability 500 cycles
- 3 Material&Finish
 - 3.1 Inner Contact: gold plated over Brass
 - 3.2 Outer Contact: nickel/Gold plated over brass.
 - 3.3 Insulators: Teflon
- 4 Cable Type: RG316D Cable

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 21/8/19 ENGINEER: C. Tao 12/11/19 APPROVED: W. Qiang 21/8/19 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: Cable Assembly SMA Male Conn. to BNC Female Conn. for RG316 Double Shield Cable 900mm Length	 www.tentilai.com
PART NO: TRL-SWAM-316D-BNCF-900	DIMENSION IN MILLIMETERS (mm)	
SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A	4	4