


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	13/05/15	13/05/15

- 1 Electrical**
- 1.1 Impedence 50 Ω
 - 1.2 Frequency DC~6GHz
 - 1.2 Dielectric withstanding voltage 1500V(volts RMS)
 - 1.3 Working Voltage: 1000V rms
 - 1.5 Insulation resistance: $\geq 5000M\Omega$


- 2 Environmental&Mechanical**
- 2.1 Temperature range -40 $^{\circ}$ ~85 $^{\circ}$ T
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials&plating**
- 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Ferrule: Copper, Nickel plated
 - 3.5 Coupling nut: Brass, Nickel plated

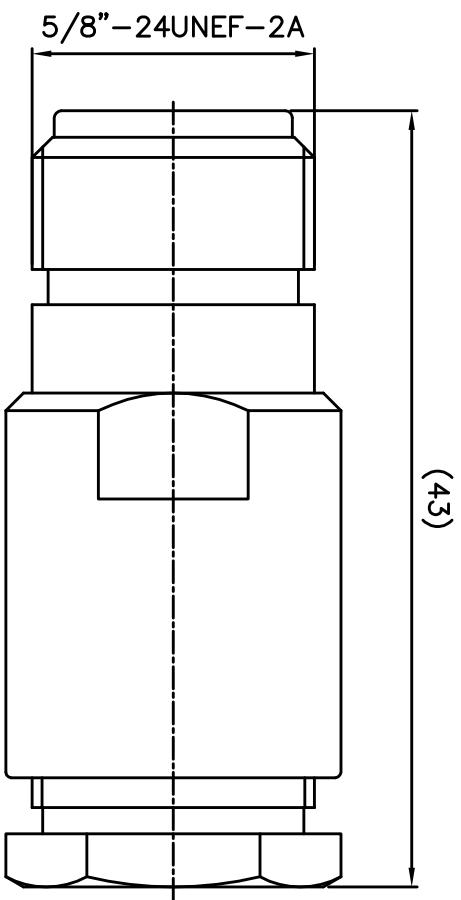

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 13/05/15	TITLE: N-K400A	 www.terwillal.com
ENGINEER: C.Too 13/05/15	N Female Conn. For LMR400 cable clamp	
APPROVED: W.Qiang 13/05/15	PART NO: TRL-NF-239526	SIZE: A4
TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: N/A
X .50		SHEET: 1/1
XX .00		REV: A
ANGLES .5 $^{\circ}$		

1 2 3 4