


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	21/08/19	21/08/19



- 1 Electrical**
- 1.1 Impedance 50 Ω
 - 1.2 frequency DC~4 GHz
 - 1.3 VSWR 1.30:1

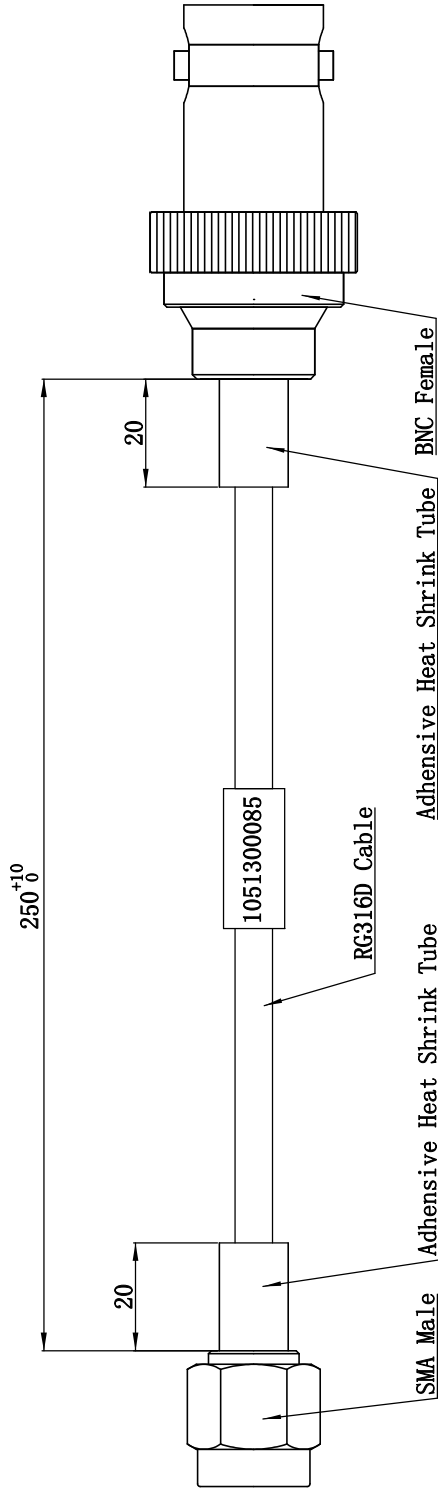

- 2 Mechanical**
- 2.1 Temperature range -45°C~125°C
 - 2.2 Durability 500 cycles

- 3 Material&Finish**
- 3.1 Inner Contact: gold plated over Brass
 - 3.2 Outer Contact: nickel/Gold plated over brass.
 - 3.3 Insulators: Teflon

4 Cable Type: RG316D Cable

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 21/8/19 ENGINEER: C. Tao 12/11/19 APPROVED: W. Qiang 21/8/19 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: Cable Assembly SMA Male Conn. to BNC Female Conn. for RG316D Cable 250mm Length (1051300085)	 www.tentilai.com  DIMENSION IN MILLIMETERS (mm)
PART NO: TRL-SMAM-316D-BNCF-250	SCALE: N/A	SHEET: 1/1
SIZE: A4	REV: A	4