


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	13/08/18	13/08/18

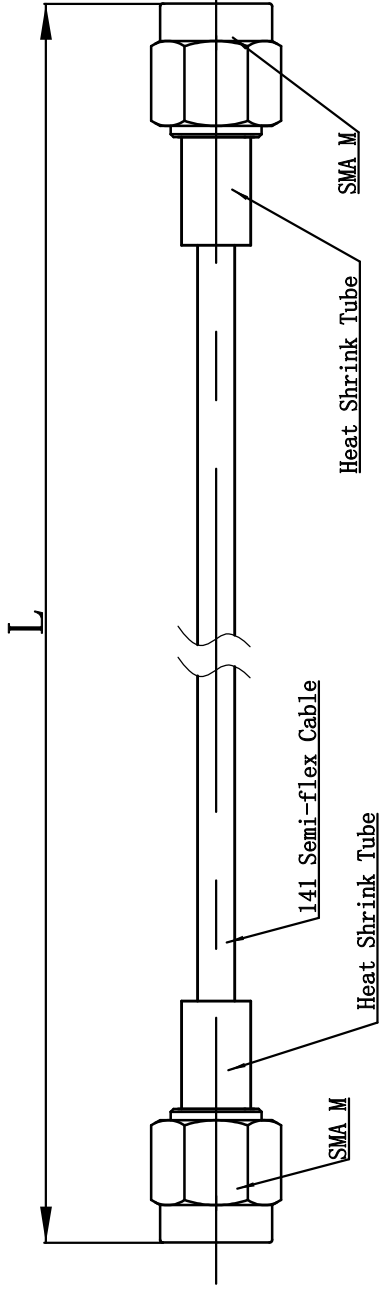

Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: 0~6GHz
- 1.3 Dielectric withstanding voltage: 1000V(rms)
- 1.4 Center contact resistance: 3M Ω
- 1.5 Outer contact resistance: 2M Ω
- 1.6 Insulation resistance: 5000M Ω
- 1.7 VSWR: 1.20:1

L	Length
L1	L1=520mm
L2	L2=500mm

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 13/08/18
ENGINEER: C. Tao 13/08/18
APPROVED: W. Qiang 13/08/18
TOLERANCES UNLESS OTHERWISE SPECIFIED
X +0.50
XX +0.20
ANGLES *°

TITLE: Cable Assembly	
SMA Male Conn. to SMA Male Conn. for .141 Semi-flex Cable RG402 Cable	
PART NO: TRL-SMAM-141-SMAM-520	

TRL www.tentilai.com

DIMENSION IN MILLIMETERS (mm)

SCALE: N/A

SIZE: A4

SHEET: 1/1

REV: A