

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	23/5/14	23/5/14

1 Electrical

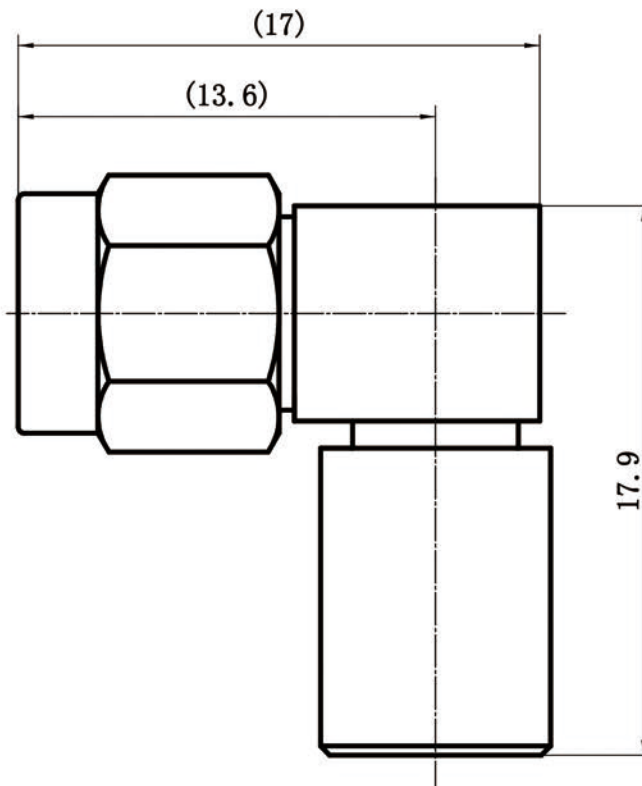
- 1.1 Impedance 50 Ω
- 1.2 Frequency DC~18GHz
- 1.3 VSWR 1.30:1

2 Environmental&Mechanical

- 2.1 Temperature range -45°C~+125°C
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles



3 Materials&plating

- 3.1 Body: Stainless Steel, Passivated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, gold plated
- 3.4 Nut: Stainless Steel, Passivated
- 3.5 Gasket: Silicon Rubber



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 25/5/14	TITLE: RF Coaxial Connector	 www.rf-connector-china.com			
ENGINEER: C. Tao 25/5/14					
APPROVED: W. Qiang 25/5/14		SMA Male R/A Conn. for TFLEX141/RG402 Cable	 DIMENSION IN MILLIMETERS (mm)		
TOLERANCES UNLESS OTHERWISE SPECIFIED	PART NO: SMA-JW141A	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
X ±0.50					
.X ±0.20					
.XX ±0.10					
ANGLES ±1°					