


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

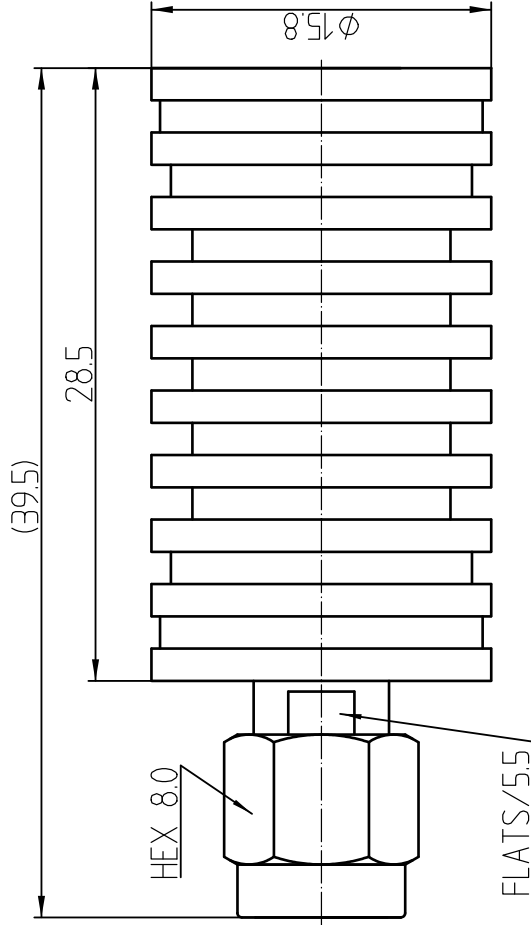


- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 VSWR 1.20:1
 - 1.4 Power 10 Watts
- 2 Materials & plating
 - 2.1 Body: Stainless Steel Passivated
 - 2.2 Insulator: Teflon
 - 2.3 Contact Pin: Bronze, gold plated
 - 2.4 Coupling Nut: Stainless Steel Passivated
 - 2.5 Outer Contact: Aluminium Oxidation Black

| REV | DESCRIPTION OF REVISION | ECN NO. | BY | DATE | APPROVED |
|-----|-------------------------|---------|-----------|----------|----------|
| A | Initial Release | | T. Haiyuu | 07/12/19 | 07/12/19 |


Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | |
|---------------------------------------|----------------------------|
| DRAWN : T. Haiyuu 07/12/19 | TITLE: RF TERMINATION |
| ENGINEER: C. Tao 07/12/19 | SMA Male Conn. Termination |
| APPROVED : W. Qiang 07/12/19 | 10 Watts |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | PART NO: SMA-50JR-10W |
| X ±0.50 | SIZE: A4 |
| X ±0.20 | SCALE: N/A |
| XX ±0.10 | SHEET: 1/1 |
| ANGLES *° | REV: A |



www.qpl.com



DIMENSION IN MILLIMETERS (mm)