

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	1/8/14	1/8/14

1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: DC-18GHz
- 1.3 VSWR: 1.25:1

2 Mechanical&Environmental

- 2.1 Temperature range -55°C ~+165°C
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant Yes

3 Material&Finish


- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Stainless Steel(SU303), Passivated
- 3.3 Insulators: PEI


4 Interface Standards

- 4.1 N MIL-STD-348A
- 4.2 2.92 MIL-STD-348A

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

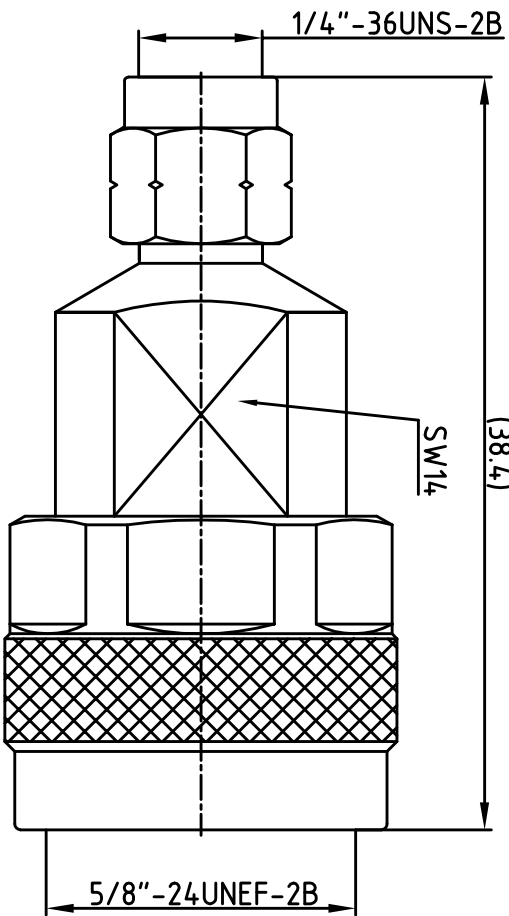

DRAWN: T.Shihua 1/8/14	TITLE: Precision Adapter	 www.terullal.com
ENGINEER: C.Too 1/8/14	Part No: N/2.92-JUG	
APPROVED: W.Qiang 1/8/14	SIZE: A4	SCALE: N/A
TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE: N/A	SHEET: 1/1
X .010	SCALE: N/A	REV: A
XX .005	SCALE: N/A	
ANGLES 5°	SCALE: N/A	