

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	2/6/16	2/6/16

1 Electrical


- 1.1 Impedence 50Ω
- 1.2 Frequency DC-2GHz
- 1.3 VSWR 1.3:1

2 Environmental&Mechanical

- 2.1 Temperature range -55℃~+165℃
- 2.2 RoHS Compliant
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, Nickel Plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Phosphor bronze, Gold plated

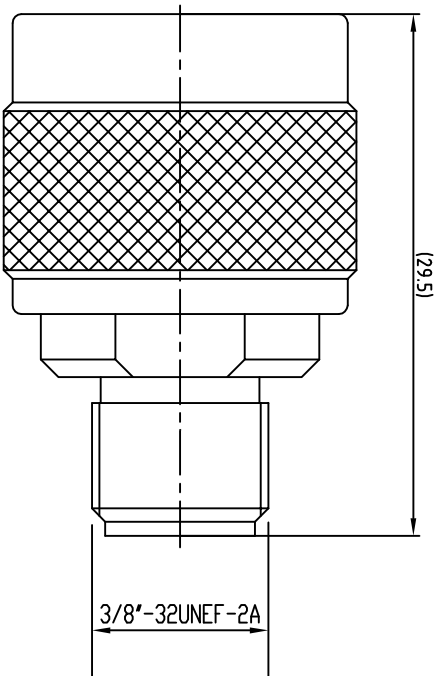

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 2/6/16	TITLE:	N male to F Female Adapter	DIMENSION IN MILLIMETERS (mm)
ENGINEER: C.Too 2/6/16			
APPROVED: W.Qiang 2/6/16	PART NO: TRL-NM-FF-9808		SIZE: A4
TOLERANCES UNLESS OTHERWISE SPECIFIED			SCALE: N/A
X ±0.30			SHEET: 1/1
X ±0.20			REV: A
.XX ±0.10			
ANGLES ±1°			

Xi'an Reach-Line Technology Co., Ltd



DIMENSION IN MILLIMETERS (mm)