


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency DC-6GHz
 - 1.3 VSWR 1.3Max
 - 1.4 Dielectric withstanding voltage 1500V(volts RMS)
 - 1.5 Center contact resistance $\leq 1M\Omega$
 - 1.6 Outer contact resistance $\leq 0.2M\Omega$
 - 1.7 Insulation resistance: $\geq 5000M\Omega$

- 2 Environmental&Mechanical
 - 2.1 Temperature range -40 $^{\circ}$ C ~ +70 $^{\circ}$ C
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials&plating
 - 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Phosphor Bronze, Gold plated
 - 3.4 Hex Nut: Brass, Nickel plated
 - 3.5 Gasket: Silicon rubber (red color)

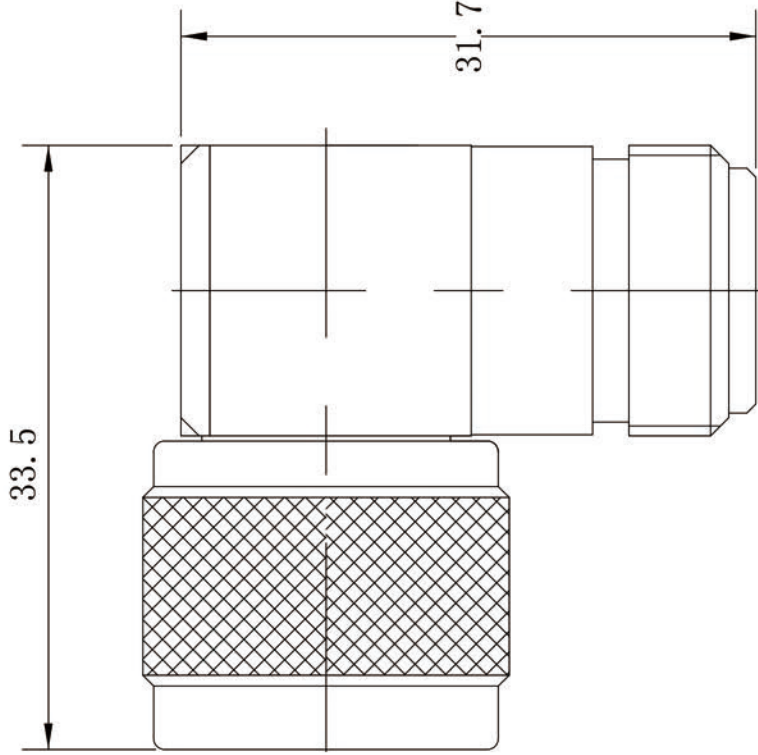

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	31/7/12	31/7/12

Notes:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 31/7/12		TITLE: RF Adaptor	
ENGINEER: C. Tao 31/7/12		N male to Female Right Angle Adapter	
APPROVED : W. Qiang 31/7/12		PART NO: N-JWK	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: 1:1	
X	+0.50	SIZE: A4	
X	+0.20	SUBJECT: 1/1	
XX	+0.10	REF: A	
	ANGLES $\neq 1^{\circ}$	DIMENSION IN MILLIMETERS (mm)	
		www.rf-connector-china.com	