
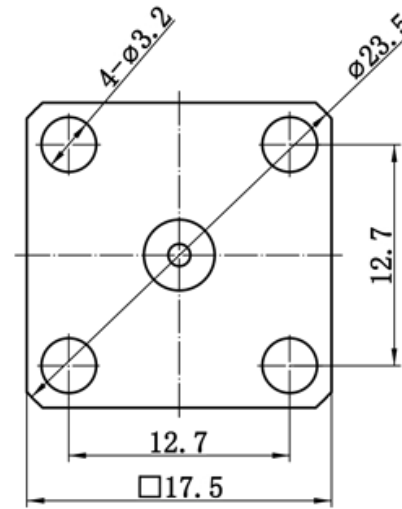


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	28/04/15	28/04/15

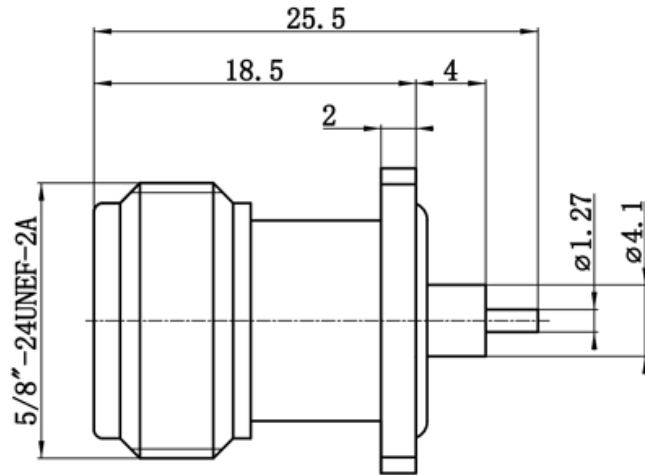

**1 Electrical**

- 1.1 Impedance                    50 Ω
- 1.2 Frequency                    DC-6GHz
- 1.3 VSWR                         1.25:1

**2 Environmental&Mechanical**



- 2.1 Temperature range        -55°C~125°C
- 2.2 RoHs Compliant
- 2.3 Durability                    >500 cycles

**3 Materials&Finish**

- 3.1 Body:                         Brass, Nickel-plated
- 3.2 Insulator:                    Teflon
- 3.3 Contact Pin:                 Bronze, gold plated

**Notes:**

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 28/04/15	TITLE:	 <a href="http://www.rf-connector-china.com">www.rf-connector-china.com</a>		
ENGINEER: C. Tao 28/04/15	RF Coaxial Connector			
APPROVED: W. Qiang 28/04/15	N Female Straight Connector Flange Mount			
TOLERANCES UNLESS OTHERWISE SPECIFIED X            ±0.50 .X          ±0.20 .XX        ±0.10 ANGLES    ±1°	 DIMENSION IN MILLIMETERS (mm)			
PART NO: N-KPD1003M-1	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A