

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		W.Qiang	18/03/06	18/03/06
B	New Release		T.Haiyun	16/07/13	16/07/13

1 Electrical


- 1.1 Impedence 50Ω
- 1.2 Frequency 0~6GHz
- 1.2 Dielectric withstanding voltage 1500V(volts RMS)
- 1.3 Working Voltage: 1000V rms
- 1.5 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~85℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles


3 Materials&plating (Micro-inch)

- 3.1 Body: Brass, nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated
- 3.4 Housing: Brass, nickel plated
- 3.5 Coupling nut: Brass, nickel plated
- 3.6 Ferrule: copper, nickel plated

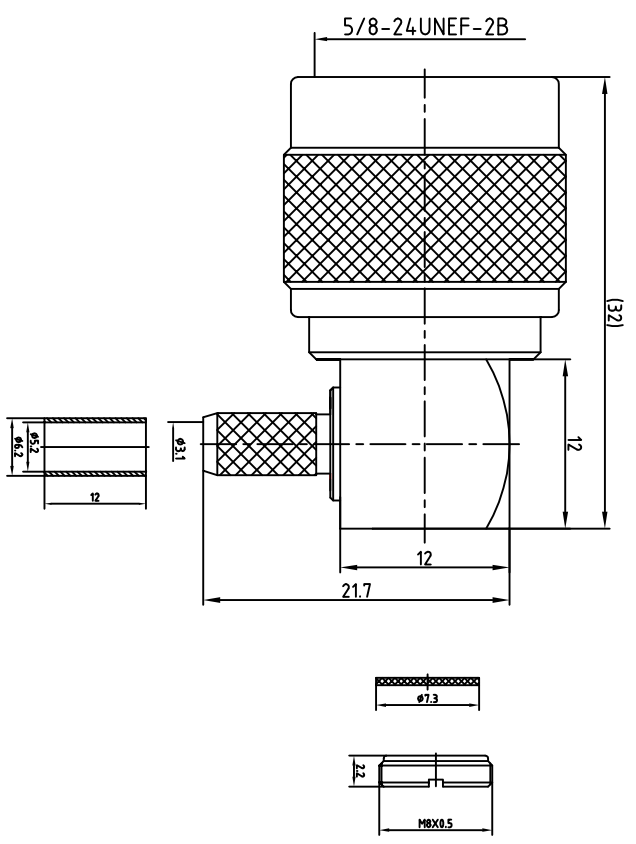

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Haiyun 16/07/13	TITLE: N-JW5Y	 www.trelytech.com
ENGINEER: C.Too 16/07/13	APPROVED: W.Qiang 16/07/13	
APPROVED: W.Qiang 16/07/13 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.20 XX ±0.10 ANGLES 3°		N male R/A Conn. For RG58 cable PART NO: TRL-WM-9348 SIZE: A4 SCALE: N/A SHEET: 1/1 REV: B