


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T.Shihua	07/09/13	07/09/13


- 1 Electrical**
- 1.1 Impedence: 50Ω
 - 1.2 Frequency range: DC-18GHz
 - 1.3 Working voltage: ≤250V
 - 1.4 Dielectric withstanding voltage: 750V(volts RMS)
 - 1.5 Insulation resistance: ≥5000MΩ
 - 1.6 Center contact resistance: ≤3MΩ
 - 1.7 Outer contact resistance: ≤2MΩ

- 2 Environmental&Mechanical**
- 2.1 Temperature range: -40℃~85℃
 - 2.2 RoHS Compliant
 - 2.3 Durability: 500 mating cycles

- 3 Materials&Finish**
- 3.1 Body: Brass, gold plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Hex nut: Brass, gold plated
 - 3.5 Gasket: Silicon Rubber
 - 3.6 Washer: Phosphor bronze, gold plated

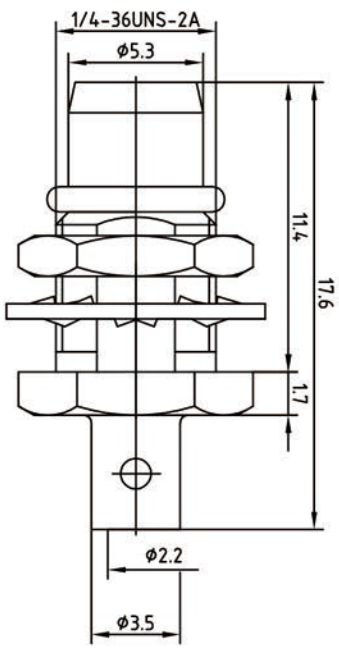

Mounting Hole



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 07/09/13		TITLE: BMA-JYB2	
ENGINEER: C.Too 07/09/13		BMA male B/H Conn. For RG402 cable	
APPROVED: W.Qiang 07/09/13		PART NO: TRL-BMAM-1813	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIZE: A4	
X	±0.20	SCALE: 1:1	
XX	±0.10	SHEET: 1/1	
ANGLES: 30°		REV: A	
www.rf-connector-china.com		DIMENSION IN MILLIMETERS (mm)	