


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	EON NO.	BY	DATE	APPROVED
A	Initial Release	---	T.Shihua	17/3/15	17/3/15
B	New Release	---	T.Shihua	18/3/15	18/3/15

- 1 Electrical
 - 1.1 Impedance 50Ω
 - 1.2 Frequency DC-300MHz
 - 1.3 Dielectric withstanding voltage 5KV rms, 50Hz(Depending on cable)
 - 1.4 Working voltage(at sea level) 1.6KV rms, 50Hz(Depending on cable)
 - 1.5 Insulation resistance ≥5000·10³MΩ
 - 1.3 Center contact resistance ≤ 2MΩ
 - 1.4 Outer contact resistance ≤ 1MΩ
 - 1.5 Corona extinction voltage ≥300V rms, 50Hz(Depending on cable)
(at 21000m)
 - 1.9 Current rating continuous ≤ 10A
- 2 Environmental&Mechanical
 - 2.1 Temperature range -55℃~155℃
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&Finish
 - 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, gold plated
 - 3.4 Housing: Brass, nickel plated

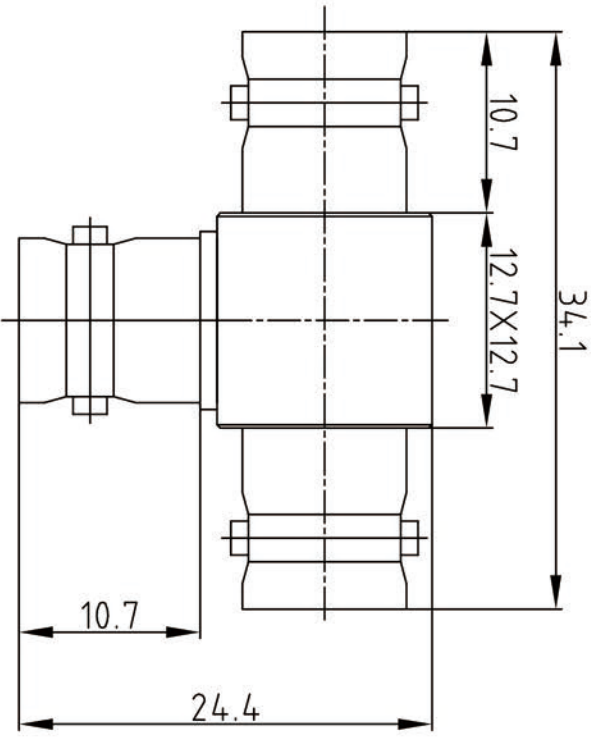

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 17/3/15	TITLE: MHV-KKK MHV Female to Female Adapter	 www.rf-connector-china.com
ENGINEER: C.Too 17/3/15		
APPROVED: W.Qiang 17/3/15		
TOLERANCES UNLESS OTHERWISE SPECIFIED X .650 XX .620 ANGES ±°		
PART NO: TRL-MHV-51291	SIZE: A4	SCALE: N/A
	SHEET: 1/1	REV: B
DIMENSION IN MILLIMETERS (mm)		