



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

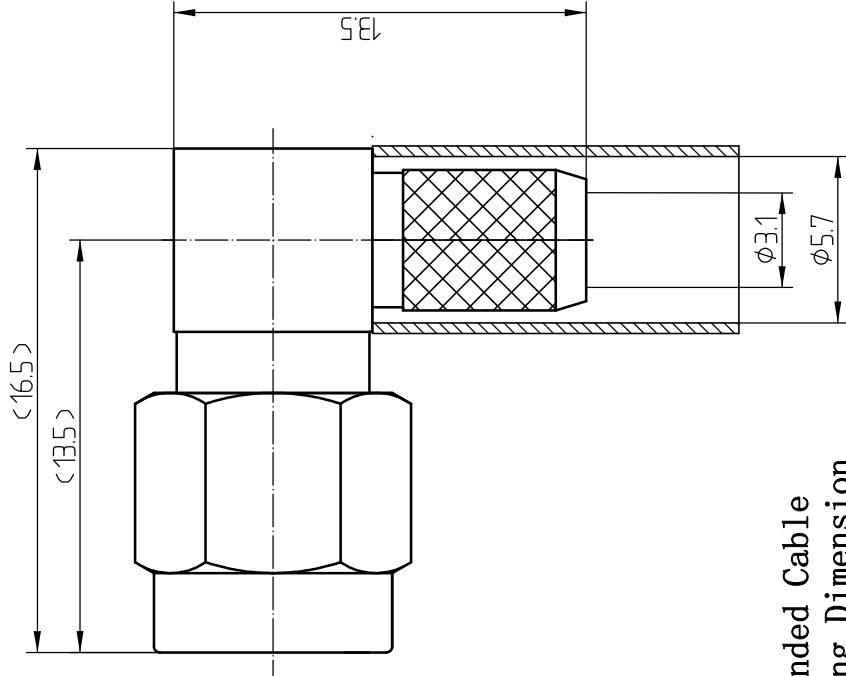

Recommended Cable Stripping Dimension

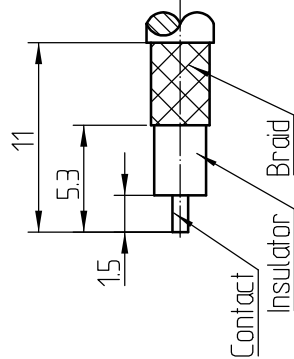

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 VSWR 1.25:1
- 2 Environmental&Mechanical
 - 2.1 Temperature range -40 $^{\circ}$ C ~+125 $^{\circ}$ C
 - 2.2 RoHs Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&plating
 - 3.1 Body: Brass, Gold Plated
 - 3.2 Insulator: Teflon,
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Nut: Brass, Gold Plated
 - 3.5 Gasket: Silicon Rubber (red color)

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	23/5/14	23/5/14

DRAWN: T. Haiyun 25/5/14 ENGINEER: C. Tao 25/5/14 APPROVED: W. Qiang 25/5/14 TOLERANCES UNLESS OTHERWISE SPECIFIED X +0.20 XX +0.10 ANGLES \neq R	TITLE: RF Coaxial Connector SMA Male RA Conn. for RG142 Cable PART NO: SMA-JW5D-A	 www.terulil.com DIMENSION IN MILLIMETERS (mm) SCALE: N/A SHEET: 1/1 REV: A
---	---	--

Notes:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY