


Danyang Teruilai Electronics Co., Ltd.

RF Coaxial Termination 2.4 2Watts DC-50GHz

ELECTRICAL DATA		
P/N	Frequency (GHz)	VSWR max
2.4-50JR-2W	DC-50GHz	1.40

MATERIAL&FINISH	
Outerconductor:	Stainless steel,Passivated
Pin contacts:	Stainless steel,Passivated
Characteristic impedance :	50Ω
Temperature range:	-55°C~+125°C
Connector Type:	2.4-J
Size:	J Ø 8×20mm ,±1%
Weight::	5g

Outline Drawing:

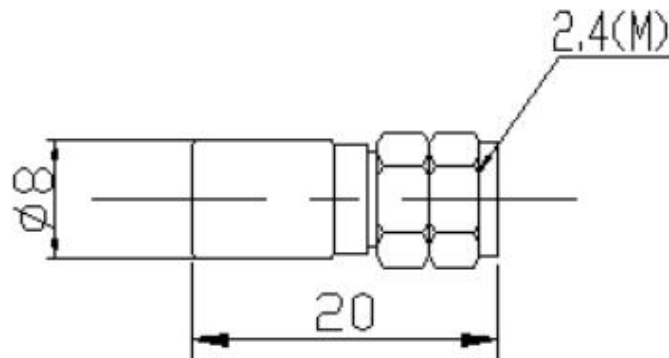

1 Liyao Road, Hi-Tech Zone, Danyang 212300 China
Tel: +86-511-86929616 Fax: +86-511-86929615

E_mail: sales@teruilai.com
www.rf-connector-china.com