

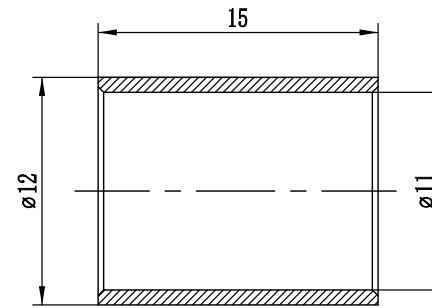


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	18/03/13	18/03/13

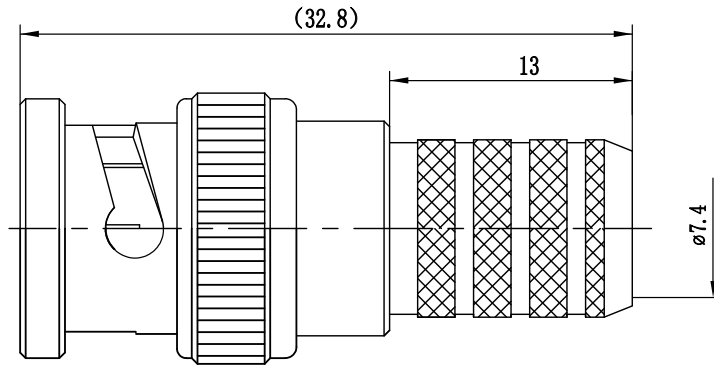

Recommended Cable Stripping Dimension

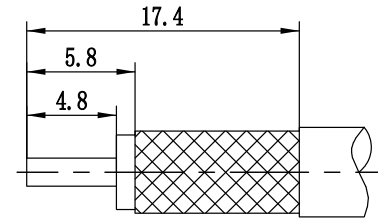

1 Electrical

- 1.1 Impedance 50 Ω
- 1.2 Frequency DC-4GHz
- 1.3 Dielectric withstanding voltage 1000V
- 1.4 Center contact resistance ≤ 3M Ω
- 1.5 Outer contact resistance ≤ 2M Ω
- 1.6 Insulation resistance: ≥5000M Ω

2 Environmental&Mechanical



- 2.1 Temperature range -45°C~125°C
- 2.2 RoHS Compliant
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, Nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Brass, Gold plated
- 3.4 Coupling Nut: Brass, Nickel plated
- 3.5 Ferrule: Copper, Nickel plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 18/03/13 ENGINEER: C. Tao 18/03/13 APPROVED: W. Qiang 18/03/13	TITLE: RF Coaxial Connector BNC Male Conn. for LMR400 Cable	 www.rf-connector-china.com
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	 DIMENSION IN MILLIMETERS (mm)	SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A
PART NO: BNC-J400Y		