


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC~4GHz
 - 1.3 Dielectric withstanding voltage 1000V (volts RMS)
 - 1.4 Center contact resistance ≤ 5.0mΩ
 - 1.5 Outer contact resistance ≤ 2.5mΩ
 - 1.6 Insulation resistance ≥ 1000MΩ
 - 1.7 VSWR 1.25:1

- 2 Materials&plating
 - 2.1 Body: Brass, Gold plated
 - 2.2 Insulator: Teflon
 - 2.3 Contact Pin: Brass, Gold plated



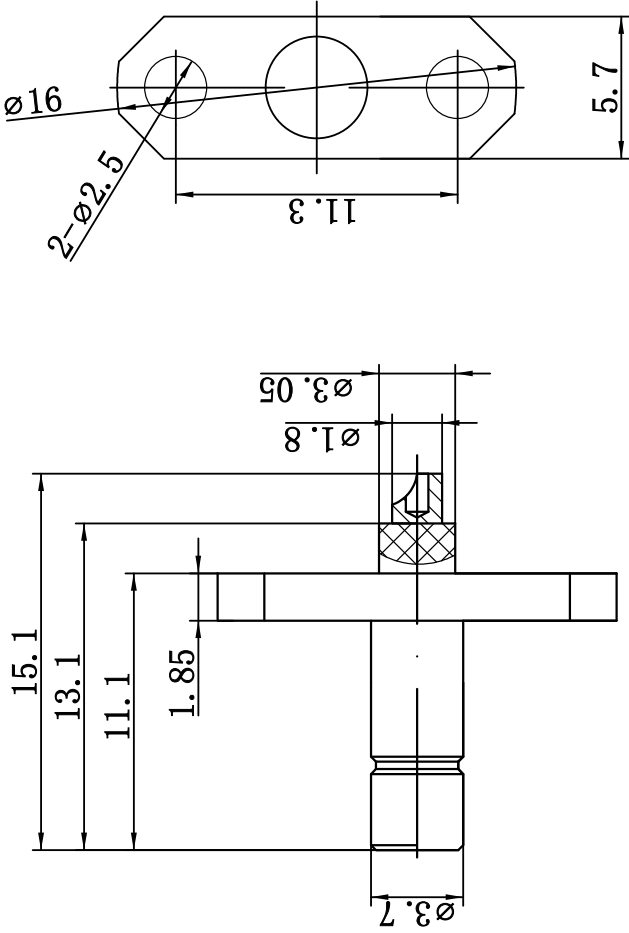

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	25/02/16	25/02/16

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 25/02/16	TITLE:
ENGINEER: C. Tao 25/02/16	RF Coaxial Connector
APPROVED: W. Qiang 25/02/16	SMB Male Flange Connector for Terminal
TOLERANCES UNLESS OTHERWISE SPECIFIED	
X ±0.50	
.X ±0.20	
.XX ±0.10	
ANGLES ±1°	

			
www.tenulal.com		DIMENSION IN MILLIMETERS (mm)	
SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A