

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

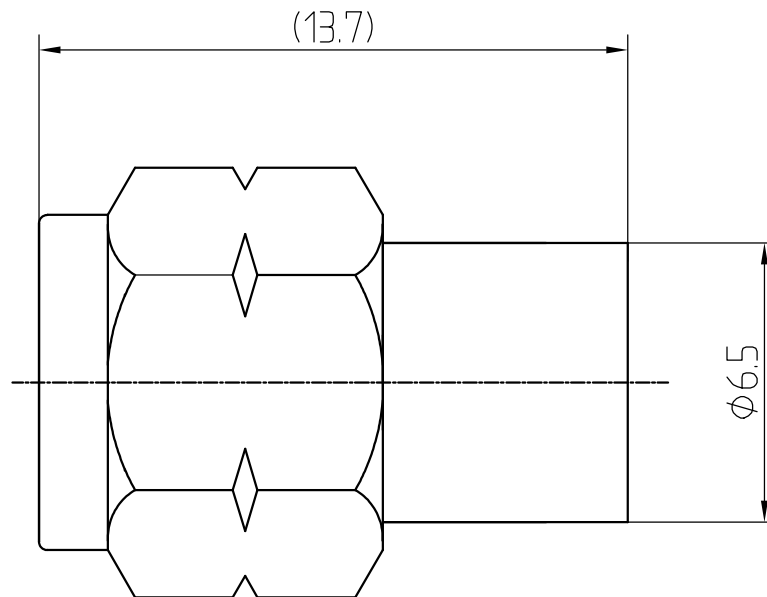
REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	18/03/17	18/03/17

- 1 Electrical
 1.1 Impedence
 1.2 Frequency
 1.3 VSWR
 1.4 Power

50 Ω
 DC ~40GHz
 1.3:1
 0.5Wmax



- 2 Materials&plating
 2.1 Body:
 2.2 Insulator:
 2.3 Contact Pin:
 2.4 Nut:

Stainless Steel; Passivated
 Pei
 Beryllium-copper, gold plated
 Stainless Steel; Passivated



Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 18/03/17	TITLE: TERMINATION 2.92mm Male Conn. Termination	 www.tri-rf.com  DIMENSION IN MILLIMETERS (mm)			
ENGINEER: C. Tao 18/03/17					
APPROVED: W. Qiang 18/03/17		PART NO: 2.92-50JR-0.5	SIZE: A4	SCALE: N/A	SHEET: 1/1
TOLERANCES UNLESS OTHERWISE SPECIFIED					
X ±0.50					
X ±0.20					
XX ±0.10					
ANGLES ±1°					