



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

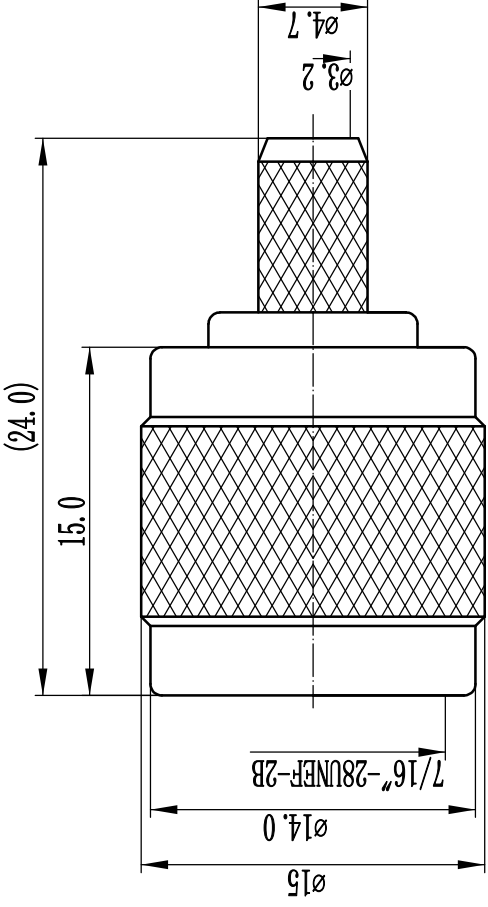

- 1 Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC ~6GHz
 - 1.3 Dielectric withstanding voltage: 1500V (volts RMS)
 - 1.4 Center contact resistance: ≤ 15MΩ
 - 1.5 Outer contact resistance: ≤ 0.2MΩ
 - 1.6 Insulation resistance: ≥ 5000MΩ
- 2 Environmental & Mechanical
 - 2.1 Temperature range: -45 °C ~ +125 °C
 - 2.2 RoHS Compliant
 - 2.3 Durability: >500 cycles

Recommended Cable Stripping Dimension

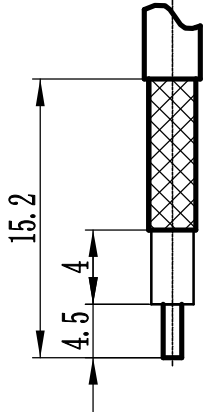

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 21/05/08		TITLE: RF Coaxial Connector	
ENGINEER: C. Tao 21/05/08		www.rf-conector-china.com	
APPROVED: W. Qiang 21/05/08		DIMENSION IN MILLIMETERS (mm)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIZE: A4	
X +0.50		SCALE: N/A	
XX +0.10		SHEET: 1/1	
ANGLES ±1°		REV: A	
PART NO: TNC-J5DYA		REV: A	