

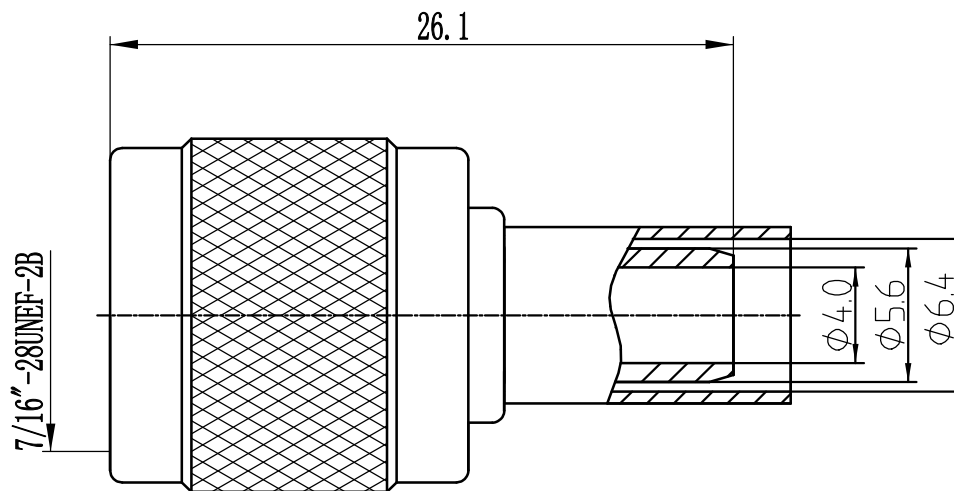
This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Haiyun	21/05/08	21/05/08

- 1 电气性能
- 1.1 特性阻抗 50 Ω
 - 1.2 频率 DC~6GHz
 - 1.3 介质耐压 1500V
 - 1.4 中心导体电阻 $\leq 1.5M\Omega$
 - 1.5 外导体电阻 $\leq 0.2M\Omega$
 - 1.6 绝缘电阻 $\geq 5000M\Omega$
 - 1.7 VSWR $\leq 1.30:1$



2 材料及涂覆

- 2.1 外壳: 黄铜, 镀三元 (3微米)
- 2.2 绝缘子: teflon
- 2.3 内导体: 黄铜, 镀金 (1.27微米)
- 2.4 螺套: 黄铜, 镀三元 (3微米)



Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 21/05/08	TITLE: RF Coaxial Connector TNC Male Conn. for LMR240 Cable Crimp	 www.teruilai.com  DIMENSION IN MILLIMETERS (mm)			
ENGINEER: C. Tao 21/05/08					
APPROVED: W. Qiang 21/05/08		PART NO: TNC-J240Y	SIZE: A4	SCALE: N/A	SHEET: 1/1
TOLERANCES UNLESS OTHERWISE SPECIFIED					
X	±0.50				
.X	±0.20				
.XX	±0.10				
ANGLES	±1°				