


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	New Release		T. Shihua	08/08/15	08/08/15

1. Electrical
 - 1.1 Impedance: 50 Ω
 - 1.2 Frequency: DC-6GHz
 - 1.3 Dielectric withstanding voltage: 1500V (volts RMS)
 - 1.4 Center contact resistance: ≤ 1MΩ
 - 1.5 Outer contact resistance: ≤ 0.2MΩ
 - 1.6 Insulation resistance: ≥ 5000MΩ
2. Environmental & Mechanical
 - 2.1 Temperature range: -45°C ~ 125°C
 - 2.2 RoHS Compliant
 - 2.3 Durability: > 500 cycles
3. Materials & Finish
 - 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, gold plated
 - 3.5 Nut: Brass, Nickel plated
 - 3.6 Washer: Phosphor bronze, nickel plated

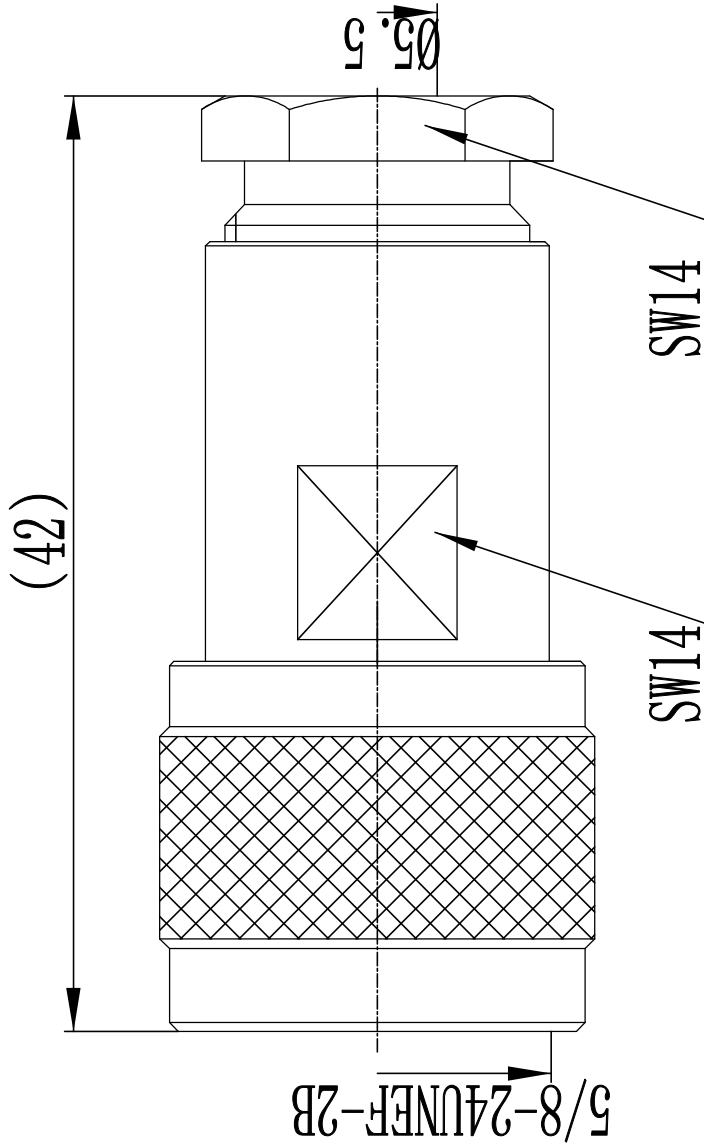

DRAWN: T. Shihua 08/08/15
ENGINEER: C. Tao 08/08/15
APPROVED: W. Qiang 08/08/15
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ±0.50
.X ±0.20
XX ±0.10
ANGLES ±1°

TITLE:
 RF Coaxial Connector
 N Male Str. Connector for RG58 Cable
PART NO: N-J5A



DIMENSION IN MILLIMETERS (mm)

SCALE: N/A	SHEET: 1/1	REV: A
------------	------------	--------

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY