


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 VSWR 1.25:1
- 2 Environmental & Mechanical
 - 2.1 Temperature range -40°C ~ +125°C
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles
- 3 Materials & Plating
 - 3.1 Body: Brass, Gold Plated
 - 3.2 Insulator: Teflon,
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Nut: Stainless Steel, Passivated
 - 3.5 Gasket: Silicon Rubber (red color)

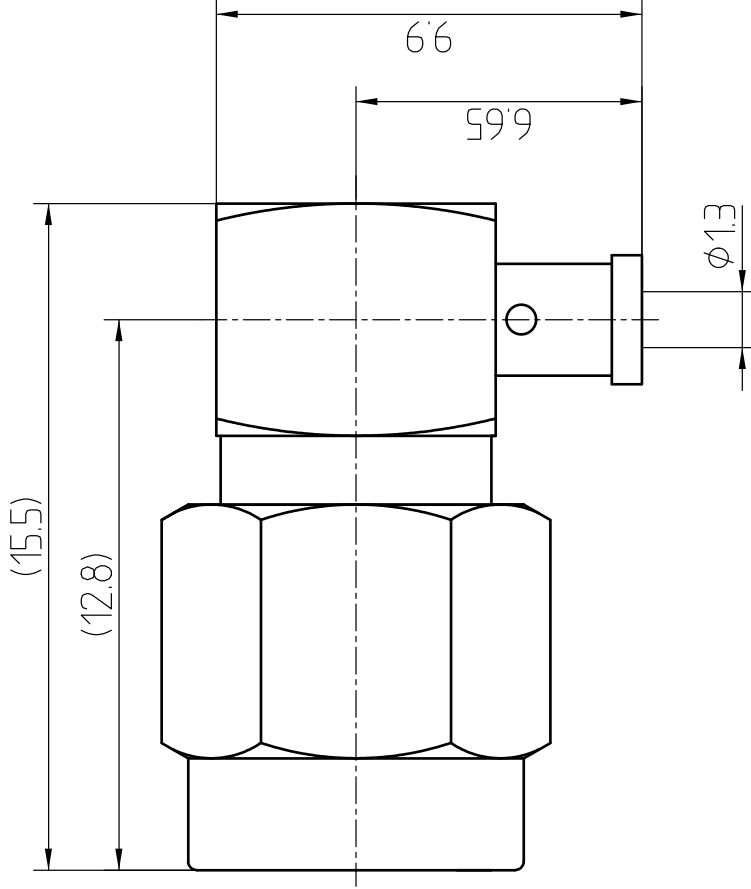

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyum	23/6/14	23/6/14

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Haiyum 25/6/14	TITLE: RF Coaxial Connector
ENGINEER: C. Tao 25/6/14	SMA Male RA Conn. for .047 Cable
APPROVED : W. Qi Tang 25/6/14	www.tbrl.com
TOLERANCES UNLESS OTHERWISE SPECIFIED	DIMENSION IN MILLIMETERS (mm)
X ±0.50	
.X ±0.20	
.XX ±0.10	
ANGLES ±°	

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------