


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
 - 11 Impedance 50 Ω
 - 12 Frequency DC ~6GHz
 - 13 Dielectric withstanding voltage 1000V(volts RMS)
 - 14 Center contact resistance $\leq 3\text{M}\Omega$
 - 15 Outer contact resistance $\leq 2\text{M}\Omega$
 - 16 Insulation resistance: $\geq 5000\text{M}\Omega$
 - 17 Power $\leq 10\text{W}$
 - 18 PIM Requirement -150dBc

- 2 Environmental & Mechanical
 - 2.1 Temperature range -40°C ~ +125°C
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials & plating
 - 3.1 Body: Brass, Suco-plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Silver, gold plated
 - 3.4 Coupling Nut: Brass, Suco-plated

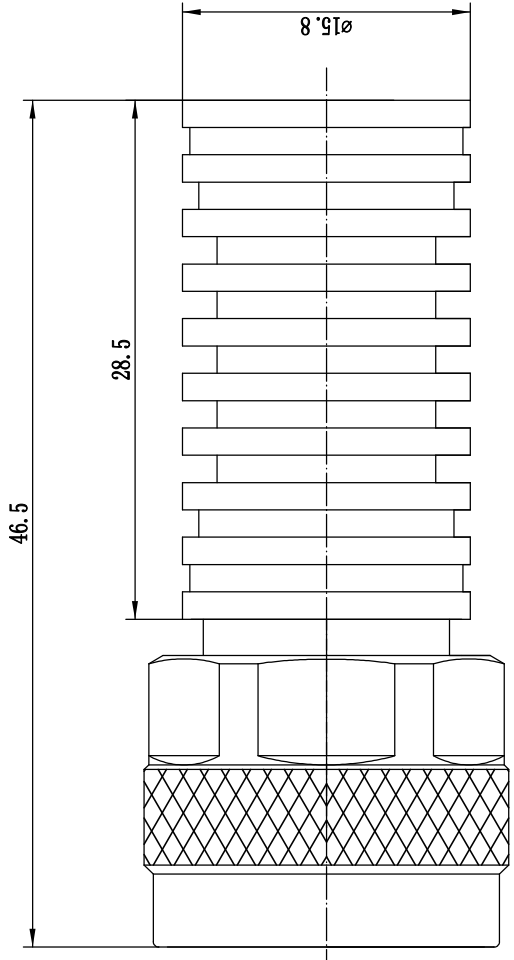

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Halynn 12/1/12 ENGINEER: C. Tan 12/1/12 APPROVED: W. Giang 12/1/12	TITLE: RF TERMINATION N Male Conn. Termination 10 Watts	DIMENSION IN MILLIMETERS (mm) 	www.f-connecochina.com.com
TOLERANCES UNLESS OTHERWISE SPECIFIED X +0.20 XX +0.10 ANGLES ±1°	PART NO: N-60UP-10-6	SIZE: A4 SCALE: N/A SHEET: 1/1	REV: A