

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	TRL NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	04/08/2022	04/08/2022

**1 Electrical**

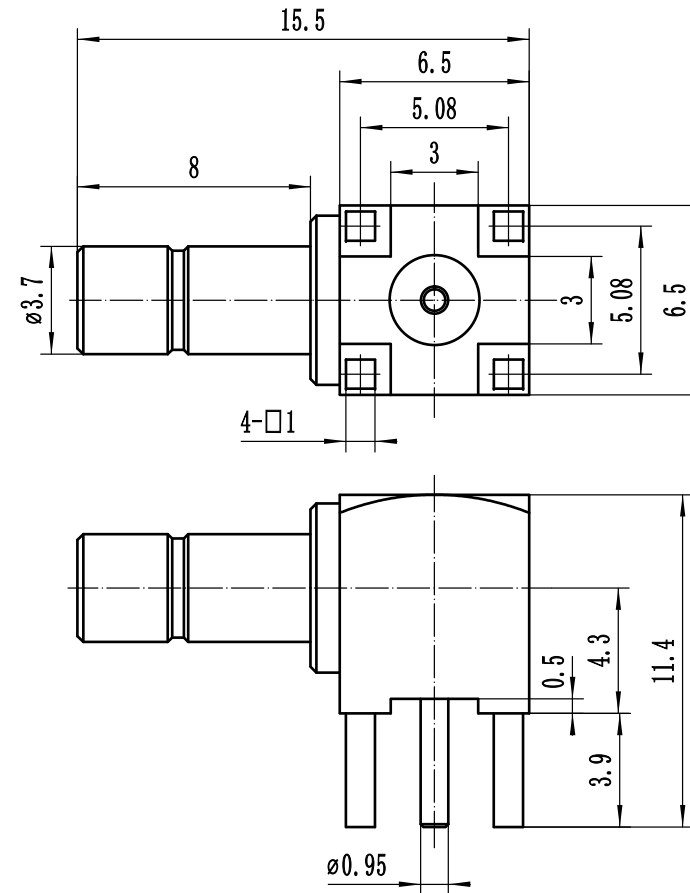
- 1.1 Impedance                    50 Ω
- 1.2 Frequency                    DC~4GHz
- 1.3 VSWR                         1.30: 1

**2 Environmental&Mechanical**

- 2.1 Temperature range        -45℃~125℃
- 2.2 RoHs Compliant
- 2.3 Durability                    >500 cycles



**3 Materials&plating**

- 3.1 Body:                         Brass, Gold plated
- 3.2 Insulator:                    Teflon
- 3.3 Contact Pin:                 Brass, Gold plated



**Notes:**

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 09/08/2022 ENGINEER: C. Tao 09/08/2022 APPROVED: W. Qiang 09/08/2022 TOLERANCES UNLESS OTHERWISE SPECIFIED .X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	<b>TITLE</b> RF Coaxial Connector SMB Jack Right Angle Solder Attachment Thru Hole PCB PART NO: SMB-JWHD10	 <a href="http://www.rf-connector-china.com">www.rf-connector-china.com</a>  DIMENSION IN MILLIMETERS (mm)		
	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: VA