


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/promocement purposes without written permission

(38.4)

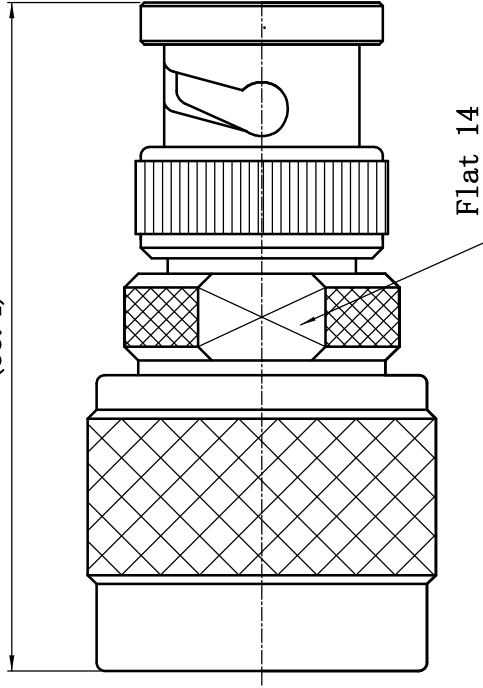


- 1 Electrical
  - 1.1 Impedance: 50 Ω
  - 1.2 Frequency: DC-4GHz
  - 1.3 VSWR: ≤1.30
- 2 Environmental
  - 2.1 Temperature -55°C ~125°C
  - 2.2 RoHs compliant
- 3 Material&Finish
  - 3.1 Inner Contact: Brass, Gold plated
  - 3.2 Outer Contact: Brass, Nickel plated
  - 3.3 Insulators: PTFE
  - 3.4 O-Ring: Silicon Rubber (red color)
  - 3.5 Coupling Nut: Brass, nickel plated

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	17/12/14	17/12/14

**Notes:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 17/12/14 ENGINEER: C. Tao 17/12/14 APPROVED: W. Qiang 17/12/14 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE: RF Coaxial Connector N Male to BNC Male adapter	 www.cablconnectors.com
PART NO: N/BNC-JJ	DIMENSION IN MILLIMETERS (mm)	SCALE: N/A SHEET: 1/1 REV: A